

Frequency Range	4x1710-2690
Polarization	±45°
Horizontal Beam Center	-29°, +29°
Half-Power Beam Width	30°

Single Band Cylinder 4x1710-2690 20dBi, 2 beam, 30-degree Antenna

Electrical Specifications

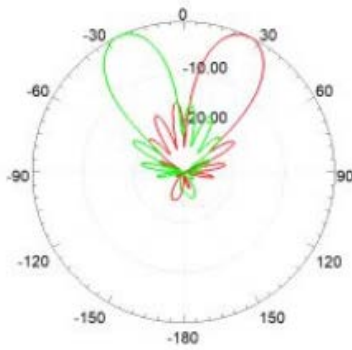
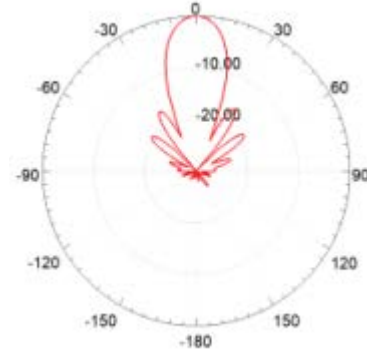
Frequency range (MHz)	2x1710-2690	
	1710-2200	2200-2690
Polarization	±45	
Gain (dBi)	15 ±1	17 ±1
Sidelobe Suppression (dB)	13	13
Horizontal Plane 3dB Beamwidth (°)	28±4	23±3
Horizontal Plane 10dB Beamwidth (°)	47±5	39±3
Vertical Plane 3dB Beamwidth (°)	26±4	23±3
Vertical Plane 10dB Beamwidth (°)	46±5	39±4
Horizontal beam centers (°)	-29, +29	
Beam Quantity	2	
VSWR	≤1.5	
Isolation Between Polarization (dB)	≥25	
Isolation Between Beam Port (dB)	≥23	
Front to Back Ratio (dB)	≥25	
Intermodulation IM3 dBc (2×43dBm)	≤-150	
Power Rating (W)	4 x 180W	
Input Impedance (Ω)	50	
Lighting Protection	DC Ground	



Mechanical Specifications

Radome Material	UPVC
Connector Type and Location	4.3-10 Female x8Bottom
Mechanical Downtilt (°)	0-20
Dimensions, HxWxD (mm)	740×400×400
Packing Size (mm)	965×515×515
Net Weight (Kg)	11
Gross Weight (Kg)	17.6
Clip Weight (Kg)	2.8
Max. Wind Velocity(m/s)	55
Mounting hardware Diameter (mm)	∅ 40 mm ~ ∅ 114 mm
Operational Temperature(°C)	-40 to +70
Operational Humidity (%)	<95

Radiation Pattern (1710 -2690 MHz)

Horizontal PatternVertical Pattern