


Frequency Range	3300-4200x2
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	0° - 10° x2

Type QUA3-2HX-CB65

Dual-Band 3300-4200 / 3300-4200 MHz 65°, 18 / 18 /dBi, 0°-10° / 0°-10°Tilt Antenna With 2 Integrated RCUs and 2 Indicators

Electrical Specifications

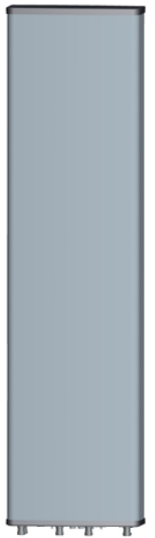

Frequency Range(MHz)		2x3300-4200	
		3300-3600	3600-4200
Polarization		±45	
Horizontal 3dB Beamwidth(°)		65	60
Vertical 3dB Beamwidth(°)		5.5	5
Gain (dBi)		17.2	17.7
Electrical Downtilt		0° - 10°	
Upper Sidelobe Suppression(dB)	First	≥16	≥16
Front-to-Back Ratio Total Power, ± 30° (dB)		≥25	≥25
Cross polar ratio	Main direction (dB)	≥17	≥17
	± 60° (dB)	≥7	≥7
Isolation ports		≥28 dB	
VSWR		< 1.5	
Impedance		50 Ω	
Max. Power per Input (at 50°C ambient temperature)		250 W	
Lightning Protection		DC Ground	

Mechanical Specifications

Radome Material	Fiberglass
Connector Type and Location	4.3-10x4, Bottom iRCU in:1 x 8 pin male iRCU out:1 x 8 pin female
Dimensions,HxWxD(mm)/(inches)	900 x 168 x 90 / 35.4 x 6.6 x 3.5
Packing Size(mm)/(inches)	1200 x 290 x 235 / 47.2 x 11.4 x 9.3
Weight ,w/o Mounting kit(kg)/(lbs)	10 / 22
Weight w/ Downtilt Bracket(kg)/(lbs)	15.5 / 34.1
Weight w/ Fixed Bracket(kg)/(lbs)	13 / 28.6
Packing Weight (w/ Downtilt Bracket) (kg)/(lbs)	21.5 / 47.3
Packing Weight (w/ Fixed Bracket) (kg)/(lbs)	19.5 / 42.9
Max. Wind Velocity(mph)	150
Mounting hardware	Φ 50 mm ~ Φ 115 mm
Operational Temperature(°C)	-40 to +65
Operational Humidity(%)	<95
Wind Load at 100mph (Frontal/lateral/Rearside(N))	175/58/125


Frequency Range	3300-4200x2
Polarization	±45°
Half-Power Beam Width	65°
Electrical Downtilt	0° - 10° x2

Type QUA3-2HX-CB65


Integrated RET Properties

RET Type	2x Type 1 Single RET	
Protocols	Compliant to AISG 2.0/3GPP	
Input voltage range	+10~+30VDC(pin 6)	
Power consumption	<2W(stand by);<13W(motor activated)	
Connectors	AISG	2 x 8 pin connector acc. To IEC 60130-9 Acc.to AISG Daisy chain in:male Daisy chain out:female
	Antenna	Two motor shaft(Embedded motor)
Hardware interface	AISG	RS485A/B(pin5/pin3);Power supply(pin6); DC return(pin7)Acc.to AISG
Adjustment time(full range)	40 sec(typically,depending on antenna)	
Adjustment Cycles	≥10000	
Torque Max	≥160mN.m	
Lightning Protection Rating	IEC 61000-4-5 Current Pulse Profile,8/20 μs 10 Repetitions Min.@ 6kA IEC 61312-1 Annex B Current Pulse Profile, 10/350 μs,200 Repetitions Min. @ 0.6KA	


COMPREHENSIVE TILT CONFIGURATION

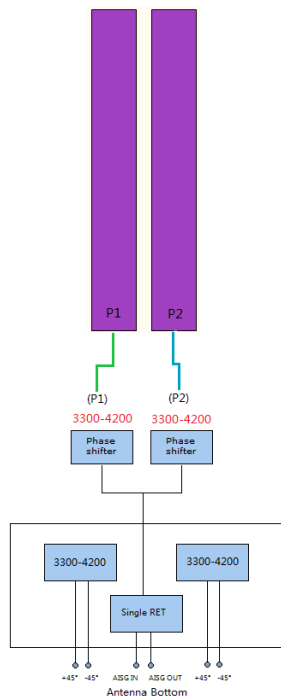

Frequency Range	Array	RET Unique ID
3300-4200MHz	P1	NDPMXXXXXXXX-3342P1
3300-4200MHz	P2	NDPMXXXXXXXX-3342P2

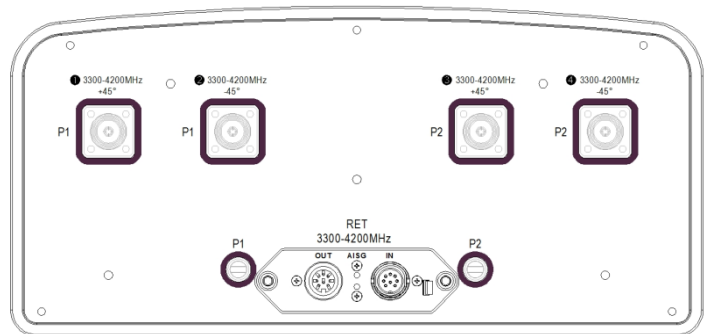


Radiation Patterns (3300 - 3600 MHz)

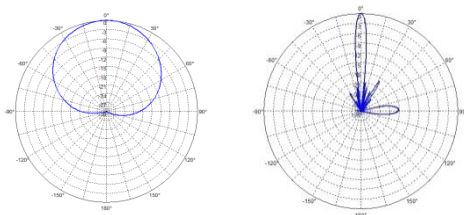

Horizontal Pattern

Vertical Pattern

Radiation Patterns (3600-4200 MHz)

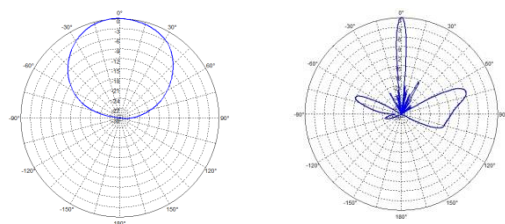

Horizontal Pattern

Vertical Pattern