

Frequency Range	698-2700
Polarization	Horizontal & Vertical
Half-Power BeamWidth	360°
Electrical Downtilt	0°

## Indoor Base Station Antenna

2-port 698–2700 MHz ,360°, 4 dBi, 0°Tilt Antenna.

### Electrical Specifications

Frequency Range(MHz)	698–800	800–960	1710–2200	2200-2700
Horizontal Beamwidth(°)	360	360	360	360
Isolation	21	21	23	23
Gain(dBi)	2	2	4	4
Polarization	Horizontal & Vertical			
VSWR	1.8			
Intermodulation IM3 @ 2×43dBm	-150 dBc			
Impedance	50 ohm			




### Mechanical Specifications


Application	Indoor
Mount Type	Thru-hole ceiling mount
Number of Ports, all types	2
Radome Color	White
Radome material	ABS
Dimensions	Diameter 256 * Height 125mm
Operating Temperature	-40 ° C to +60 ° C
Relative Humidity	Up to 100%
RoHS	Compliant

Frequency Range	698-2700
Polarization	Horizontal & Vertical
Half-Power Beam Width	360°
Electrical Downtilt	0°

## Patterns

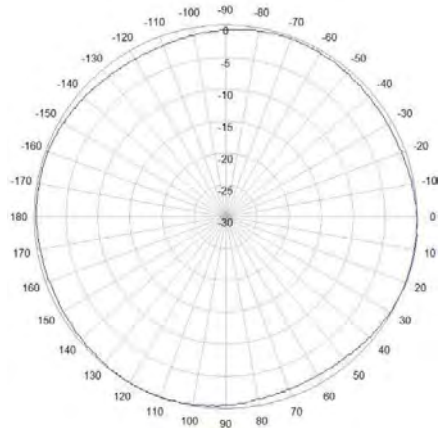


800MHz

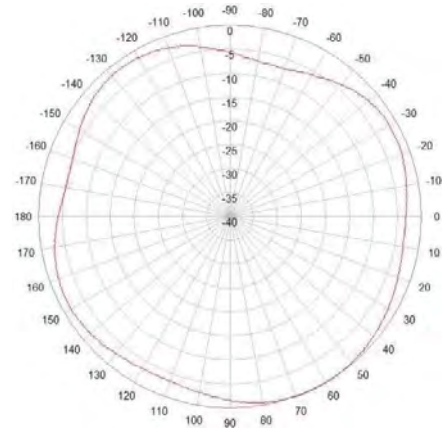


2300MHz

Horizontal

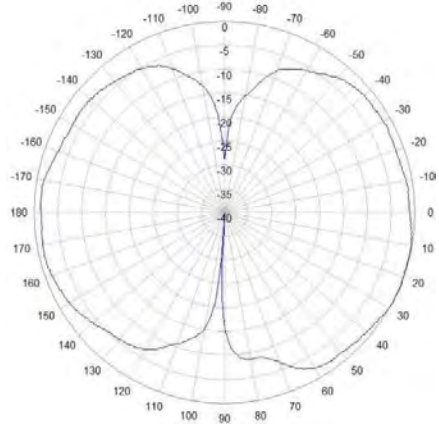

800MHz

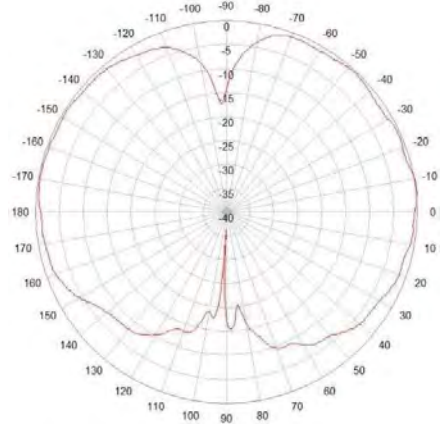

2300MHz

Vertical