

Frequency Range	1695-6000
Polarization	Linear
Half-Power BeamWidth	360°
Electrical Downtilt	0°

Type QUA1-4AM-0R360

Indoor Base Station Antenna

4-ports 1695–6000 MHz ,360°, 6.0 dBi, 0°Tilt Antenna.

Electrical Specifications

Frequency Range(MHz)	1695–2700	3300–4200	4800–6000
Horizontal Beamwidth(°)	360	360	360
Gain(dBi)	4.4	5.9	5.3
Polarization	Linear		
Isolation, dB	17	24	
VSWR	1.8		
Intermodulation IM3 @ 2×43dBm	-153 dBc		N/A
Impedance	50 ohm		




Mechanical Specifications

Application	Indoor
Mount Type	Thru-hole ceiling mount
Number of Ports, all types	4
Radome Color	White
Radome material	ABS
Dimensions	Diameter 210 * Height 14mm
Operating Temperature	-40 °C to +60 °C
Relative Humidity	Up to 100%
RoHS	Compliant


Frequency Range	1695-6000
Polarization	Linear
Half-Power BeamWidth	360°
Electrical Downtilt	0°

Type QUA1-4AM-0R360


Patterns

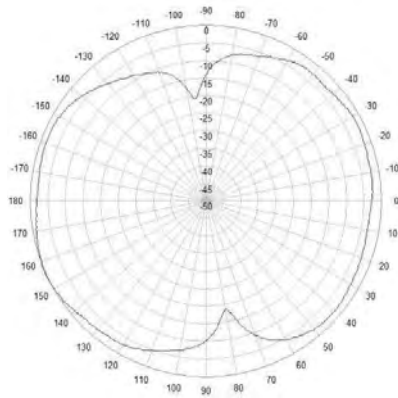

1695-2700MHz

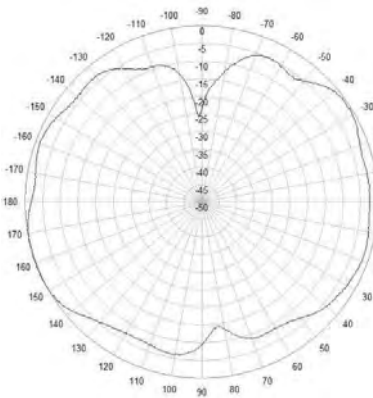


3300-3800MHz

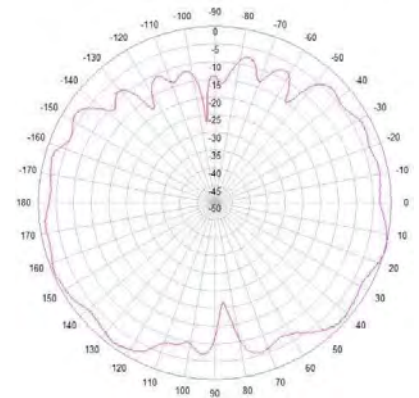


4900-6000MHz


Horizontal

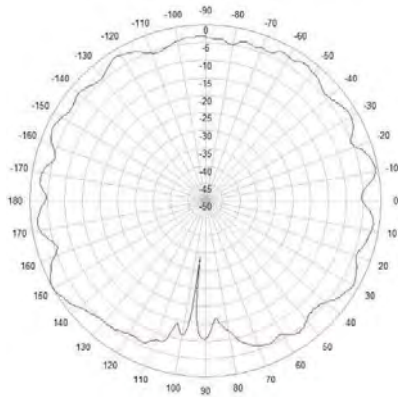

1695-2700MHz

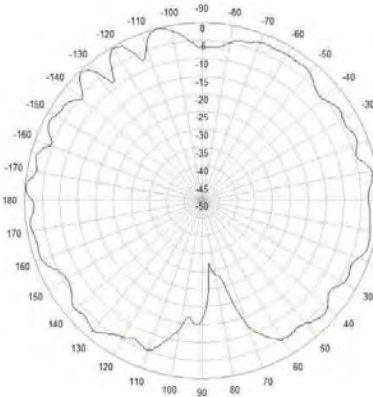

3300-3800MHz

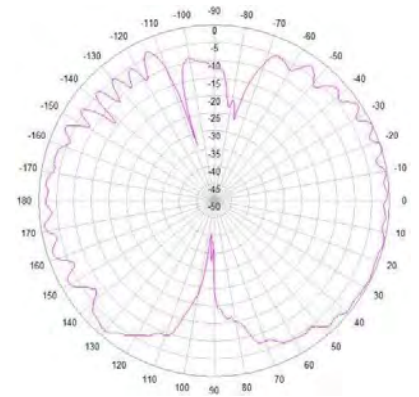

4900-6000MHz

Vertical